


Power Management Solution

SANUPS × NUTANIX™

SANYO DENKI's UPS option SANUPS LAN Interface Card is certified Nutanix AHV Ready.

Installed in our UPS, the LAN Interface Card enables automatic shutdowns and restarts of your Nutanix environments during and after an outage.


No need to test compatibility with Nutanix environments.

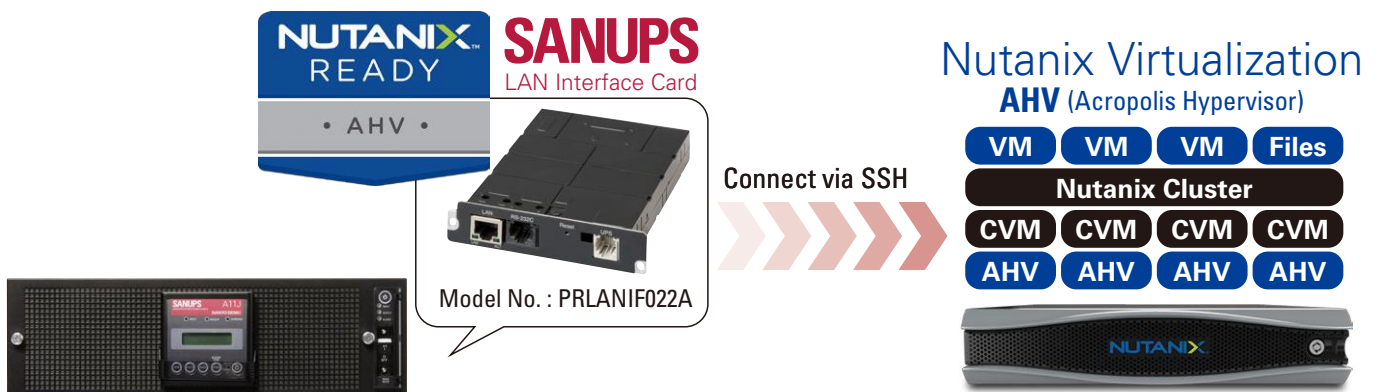


Power Management Software Not Required

Requires no shutdown server or software. Also, storage for shutdown/restart script files is not necessary on the Nutanix side, contributing to cost reduction.

■ Shutdown sequence

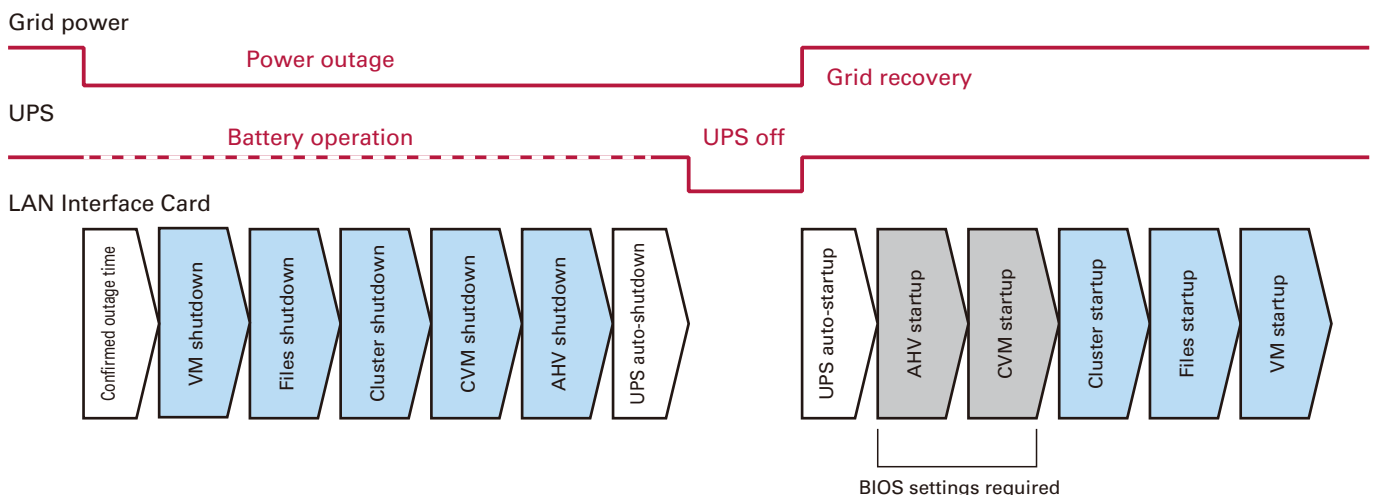

■ Redundant power configuration

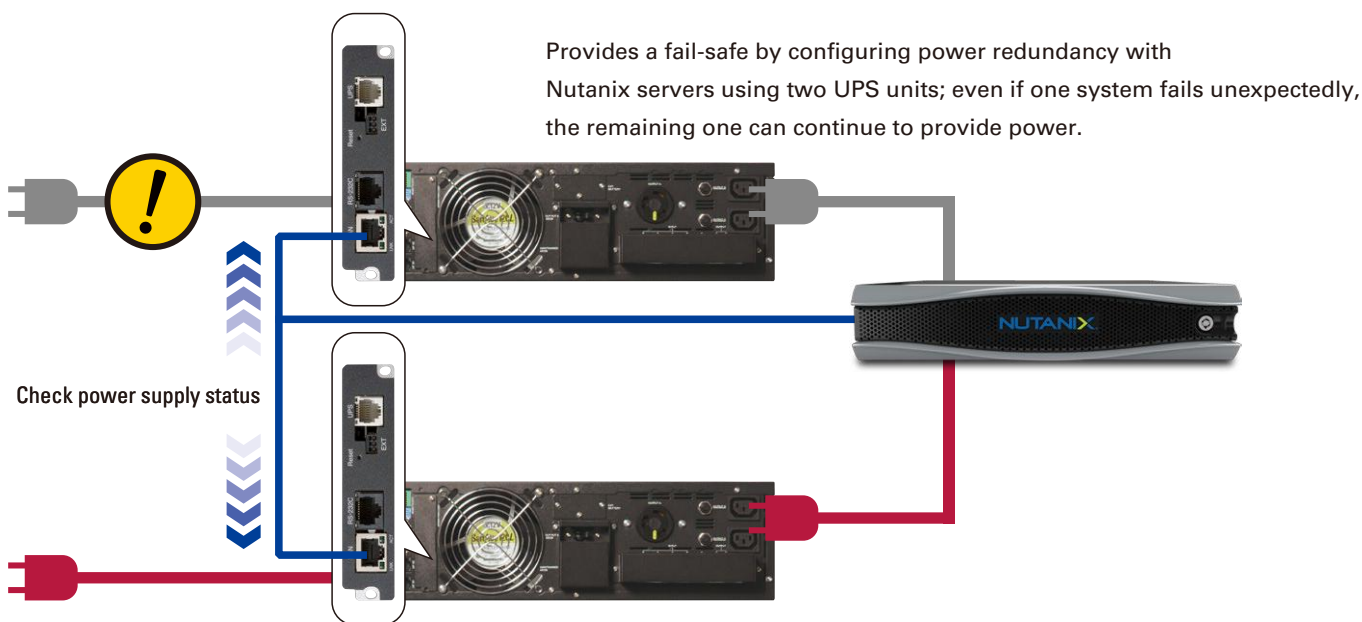

For more information, visit the SANUPS LAN Interface Card product page on the SANYO DENKI website.
<https://products.sanyodenki.com/en/sanups/power-management/lan-if-card/>



■ Major compatible products

Online UPS

SANUPS A11J

Output capacity	Battery backup time*	Input connector	Output connector	Model no.
5 kVA	10 minutes	Outlet	Outlet + terminal block	S-A11J502A010N-4U
		Terminal block	Terminal block	S-A11J502A010T-4U

* At a 25°C ambient temperature, 0.8 load power factor, using new, fully charged batteries.



Online UPS

SANUPS A11K-Li

Output capacity	Battery backup time*	I/O connector	Model no.
1.5 kVA	19 minutes	Outlet	S-A11KL152B0019SSN00
3 kVA		Outlet	S-A11KL302B0019SSN00
		Terminal block	S-A11KL302B0019SST00

* At a 25°C ambient temperature, 0.8 load power factor, using new, fully charged batteries.

Lithium-ion
Battery

UPS unit
3-year
warranty



SANYO DENKI UPS lineup includes a variety of models available in many capacity and backup time variations. For details, please contact our sales representative.