

6172 Series Thin Clients

Industry Leading Endpoints & Management Software

The Nutanix Frame Ready 10ZiG 6172q is a Thin Client extreme series performance beast! Its small-footprint design features an Intel Quad Core 2.3GHz (3.2GHz Burst) processor and is powered by PeakOS™, 10ZiG’s purpose-built, Linux-based custom Thin Client OS. Engineered for performance, security, simplified configuration, and management for Cloud Workspaces and Virtual Desktops, this endpoint features the Nutanix Frame Linux App; is compact, durable, reliable, fanless; and features 4K UHD support, USB Port C, Wireless Option, and TAA Compliance. The 6172q comes equipped with free centralized management via the cloud-enabled 10ZiG Manager™ with unlimited user licenses and, is covered by a 3-Year Advance Warranty, Technical Support, and Software Upgrades.




- ▶ AMD Dual Core 2.3GHz (3.2GHz Burst)
- ▶ 4 x DisplayPort (3840 x 2160), 4K @ 60Hz
- ▶ Up to 32GB DDR4 RAM for High Speed Support
- ▶ 5 x USB Port 2.0, 2 x USB Port 3.0, 1 x USB Port Type C
- ▶ RJ45 LAN/Fiber LAN (SFP) Ready Options
- ▶ TAA Compliant
- ▶ Optional Wireless (Dual External Antenna)
- ▶ Supports VESA Mount and Kensington Lock
- ▶ FREE Centralized Management via 10ZiG Manager™

6172 Series Thin Clients



System	
Management	10ZiG Manager™
RAM	Std: 8GB, Max: 8GB
Storage	Std: 8GB, Max: 256GB
Processor	AMD Dual Core 2.3GHz (3.2GHz Burst)
Processor Graphics	Radeon Vega 3
Dimensions	
Device	8.27" (D) x 2.09" (W) x 9.06" (H) in.
Weight	5.64 lbs. (2.56 kg.)
Connections	
Ports on Device	4 x DisplayPort, 5 x USB Port 2.0, 2 x USB Port 3.0, 1 x USB Port Type C, 1 x Smart Card Reader, 1 x Mic-In, 1 x Line-Out, 1 x DC Jack
Video Resolution	4 x (3840 x 2160) @ 60Hz (4 Monitors at 4K UHD)
Networking	
Wireless	Optional (802.11 a/b/g/n/ac External Antenna)
Ethernet	10/100/1000 Base-T, RJ45 LAN or Fiber LAN (SFP) Optional
Environmental	
Operating Temp.	32°- 95°F (0° - 35°C), 20-80% non-condensing humidity

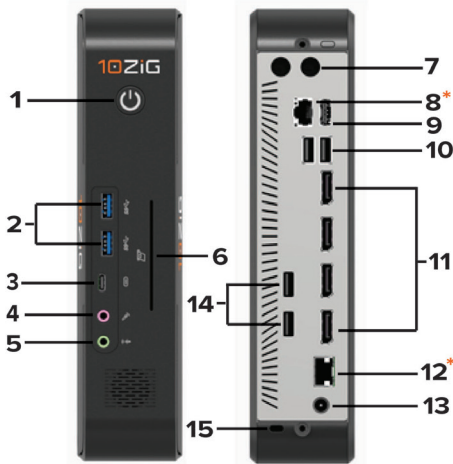

SPECIFICATIONS

- | | |
|---------------------------------|-------------------------------------|
| 1. Power Button | 9. USB 2.0 |
| 2. USB 3.0 | 10. USB 2.0 |
| 3. USB C | 11. DisplayPorts |
| 4. Mic-In | 12. Fiber LAN/SFP Ready (Optional)* |
| 5. Line-Out | 13. DC Jack |
| 6. Smart Card Reader (Optional) | 14. USB 2.0 |
| 7. Antenna Holes | 15. Kensington Lock Slot |
| 8. RJ45 LAN (Optional)* | |

*Available in RJ45 LAN Support or Fiber LAN/SFP Ready Support.

Note: Actual display performance, such as multi-monitor and higher resolutions including 4K/UHD/QHD/WQHD are dependent upon your current VDI infrastructure and any additional requirements. Consult with 10ZiG for further guidance and model recommendation.

*Optional Application may require alternative model; please speak to a sales representative to confirm.

Americas
EMEA
APAC
DE

P: +1 (866) 865-5250
P: +44 (0) 116 214 8650
P: +61 2 80027421
P: +49 (0) 6724 9304-45

E: info@10ZiG.com
E: info@10ZiG.eu
E: info@10ZiG.com.au
E: Vertrieb@10zig.de

W: www.10ZiG.com

